

// **NEW: Ribbed designs, side elements and transom lights**



# ThermoPro Entrance Doors

Steel entrance doors and side doors



## Enjoy your home

Entrance doors in proven Hörmann quality



Hörmann's steel ThermoPro doors are available in a large selection of styles. Thanks to standard multiple-point locking, these inexpensive doors give you a feeling of security, save energy through excellent thermal insulation and provide a stylish appearance for your home.

## Without visible leaf frame

Hörmann's ThermoPro entrance doors have an exclusive appearance. A beautifully shaped smooth door leaf made of steel, without a visible leaf frame, simply looks good.

## High thermal insulation

Nowadays, people try to save energy everywhere in their homes and ThermoPro doors also play their part. Thanks to a 46-mm-thick door leaf completely filled with PU rigid foam, these doors provide excellent thermal insulation with a U-value of up to 1.2 W/m<sup>2</sup>K, reducing your energy bills.

## The best sealing possible

Double seals on all four sides with additional corner seals near the bottom provide extra protection against bad weather. Heat loss is reduced.

## 12-point security

Because you and your family want to feel safe at home, all ThermoPro doors are equipped with multiple-point locking as standard for extra security.

## Break-in-resistant WK 2 security equipment

Many entrance door styles\* also come with WK 2 equipment for more security for you and your family.



## Certified brand quality

All ThermoPro doors are manufactured in line with ISO 9001 and regularly subjected to the strictest quality tests. A CE mark indicates that the doors comply with EU directives in accordance with EN 14351-1. All of the door requirements laid out therein are adhered to. The advantages for you:

- Water-tight under heavy rain
- Stable under heavy winds
- Airtight
- Acoustic insulation
- Thermal insulation




\* Without side elements



High thermal insulation thanks to a door leaf with thermal break, filled with PU rigid foam.



Double seals with additional brush seal at the bottom protects against bad weather.

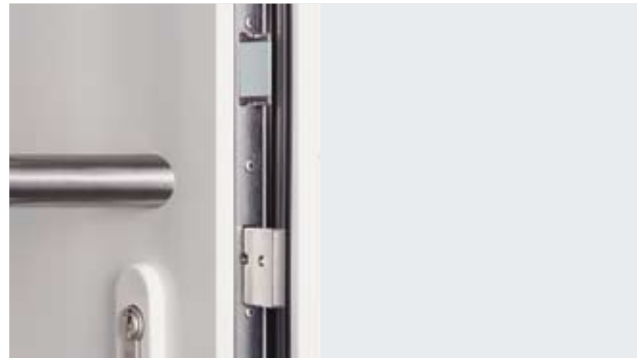

Standard 5-point locking gives you a feeling of security.



With 75 years of experience and more than 15 million doors sold, Hörmann has become number 1 in Europe for garage doors. Hörmann's automatic sectional doors feature modern convenience, high security, and a sophisticated appearance. Your Hörmann partner will be pleased to advise you further.

# Fully equipped as standard

Brand quality will win you over in every respect

## 12-point locking with a pivoting bolt lock

You will feel safe at home: 2 conical swing bolts engage with 2 additional security bolts and 1 lock bolt in the frame's lock plates and pull the door tightly shut. Three further security bolts on the hinge side in conjunction with the 3 standard hinges make it practically impossible to force the door open. With a soft-lock latch to quietly close the door.



Soft-lock latch




Locking rod



Swing bolt with security bolts



Security bolts

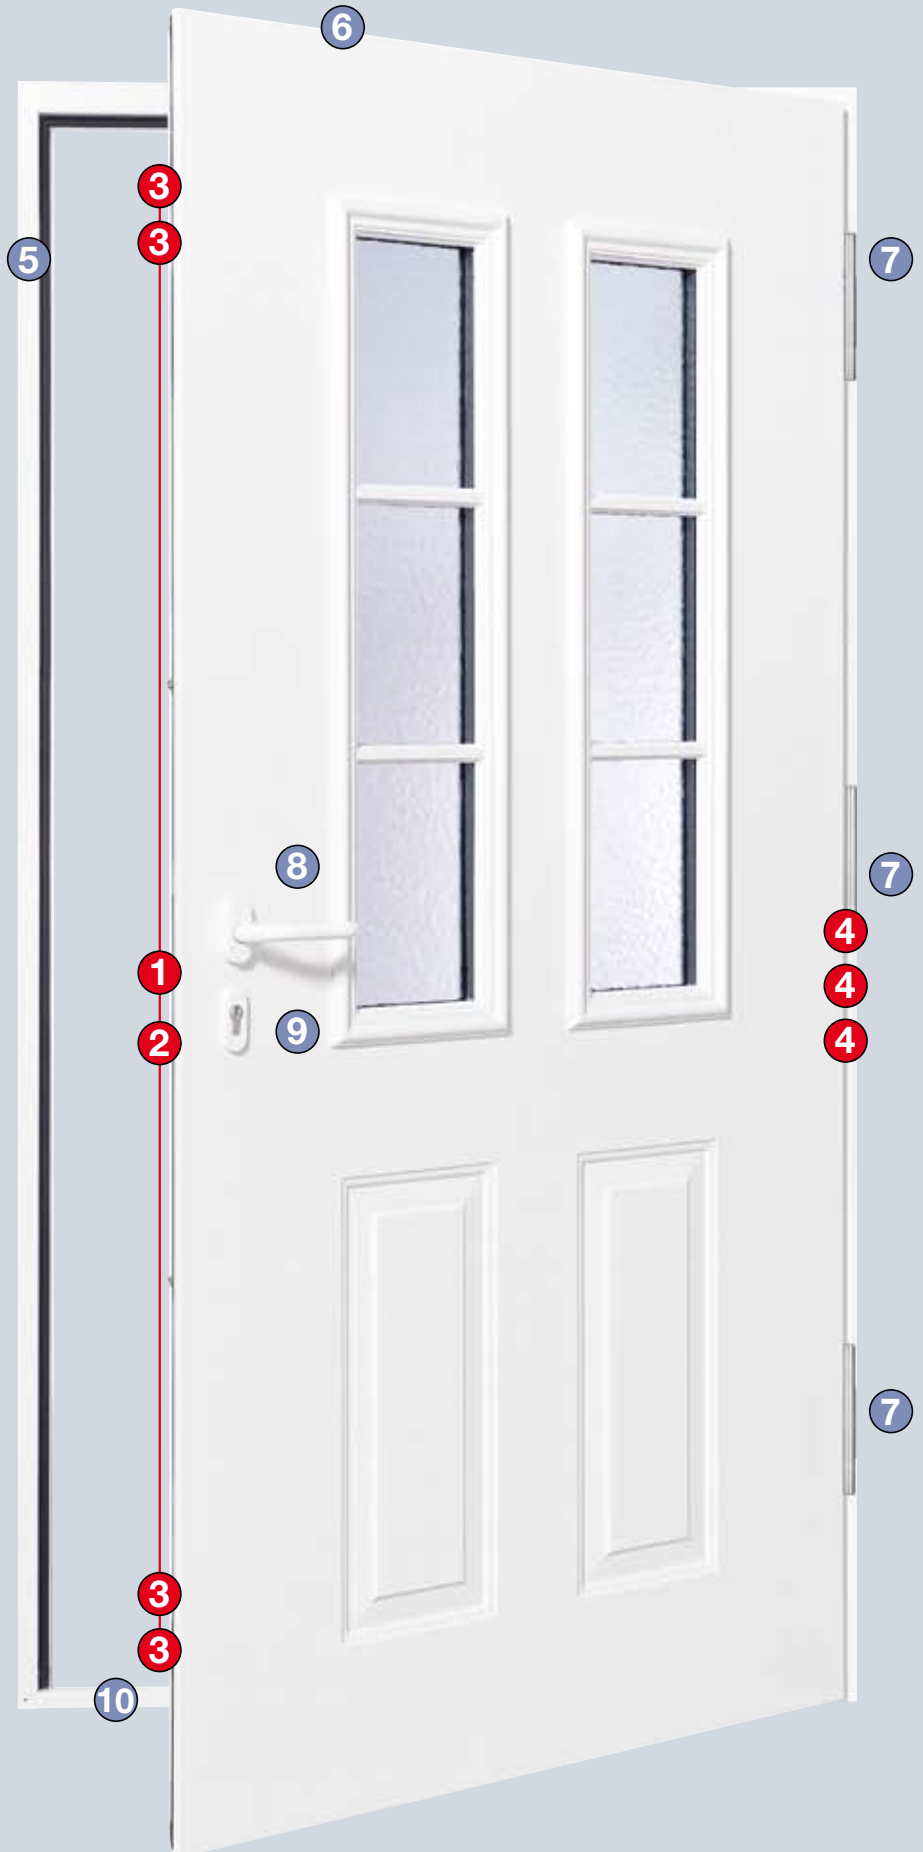

5



#### Aluminium frame

An aluminium frame with thermal break provides exceptionally high thermal insulation and the round-style design gives your door an extremely exclusive appearance.

6



#### Flush-fitting door appearance

A smooth, all-over door leaf without visible leaf frame creates a harmonious appearance.

7



#### Perfectly hung with 3-way adjustable hinges

Sturdy, two-part 3-way adjustable hinges with aluminium decorative covers guarantee smooth door function.

8



#### Interior lever

Each door comes with a beautifully-shaped interior lever and rose escutcheon on the exterior as standard. In white, aluminium or stainless steel as standard.

9



#### Profile cylinder

Delivered with 5 keys as standard. With emergency and hazard function, i.e. the door lock can still be operated when the key is inserted on the inside.

10



#### The best sealing possible

Save valuable energy: a 20-mm-high aluminium/plastic threshold with thermal break and double, all-round seals reduce heat loss. The additional brush seals at the bottom provide optimum protection against bad weather.

### Optional extras for added convenience and security:

#### Electric strike

With the electric strike catch, you can conveniently open your door via a switch inside the house. Alternatively, e.g. during the day, you can also toggle the locking lever so that the entrance door can be opened by a slight push from the outside.

#### Door drip

Attractive protection: The door drip in Traffic white RAL 9016 diverts driving rain and is easy to retrofit.

## High thermal insulation

The entrance doors on this page are characterised by flush-fitting triple-pane glazing on the interior and exterior for especially good thermal insulation.





**TPS 700** in Traffic white RAL 9016.

**TPS 800** in Traffic white RAL 9016.



**TPS 900** in Traffic white RAL 9016, with side elements (optional).

### TPS 700

Stainless steel handle HB 38-2 on steel infill, full glazing: Triple-pane insulated glass, sand-blasted with clear horizontal stripes and clear laminated safety glass. U-value up to 1.5 W/m<sup>2</sup>K\*.

### TPS 800

Stainless steel handle HB 38-2 on steel infill, with 4 glazing squares: Triple-pane insulated glass, sand-blasted with clear squares and clear laminated safety glass. U-value up to 1.5 W/m<sup>2</sup>K\*.

### TPS 900

Stainless steel handle HB 38-2 on steel infill, with rounded glazing: Triple-pane insulated glass, sand-blasted with clear horizontal stripes and clear laminated safety glass. U-value up to 1.6 W/m<sup>2</sup>K\*.

### TPS 700/800/900

#### side elements/transom lights

- Double-pane insulated glass, sand-blasted float without clear stripes
- Double-pane insulated glass, clear laminated safety glass

#### Glazing frame

- Stainless steel



#### Colours/ surface finishes

- In 11 preferred colours
- With Decograin surface finish



#### WK 2 version

All door styles without side elements or transom lights are also available in a break-in-resistant WK 2 version.



## Long-lasting brand quality

Hörmann steel ThermoPro doors are hot galvanized, corrosion-resistant and come with a high-quality polyester paint.







TPS 010 in Traffic white RAL 9016.



TPS 020 in Traffic white RAL 9016.



TPS 030 in Traffic white RAL 9016.



TPS 040 in Traffic white RAL 9016.

### TPS 010

Stainless steel handle HB 14-2 on steel infill, U-value up to 1.2 W/m<sup>2</sup>K\*.

#### TPS 010 side elements/transom lights

- Double-pane insulated glass, Mastercarré/clear laminated safety glass
- Double-pane insulated glass, ornamental glass 504/clear laminated safety glass
- Double-pane insulated glass, sand-blasted float/clear laminated safety glass
- Double-pane insulated glass, clear laminated safety glass

### TPS 020/TPS 030

Stainless steel handle HB 14-2 on steel infill, full glazing: Double-pane insulated glass, Mastercarré and clear laminated safety glass. U-value up to 1.4 W/m<sup>2</sup>K\*.

#### TPS 020/030 side elements/transom lights

- Double-pane insulated glass, Mastercarré/clear laminated safety glass
- Double-pane insulated glass, clear laminated safety glass

### TPS 040

Stainless steel handle HB 14-2 on steel infill, with round glazing Ø 300 mm: Double-pane insulated glass, ornamental glass 504 with fine structure. U-value up to 1.3 W/m<sup>2</sup>K\*.

#### TPS 040 side elements/transom lights

- Double-pane insulated glass, ornamental glass 504/clear laminated safety glass
- Double-pane insulated glass, clear laminated safety glass

#### Glazing frame

- Plastic round-style frame



#### Colours/ surface finishes

- In 11 preferred colours
- With Decograin surface finish (TPS 010)



#### WK 2 version

Door style TPS 010 without side elements or transom lights is also available in a break-in-resistant WK 2 version.



## Ribbed styles // NEW

All-over elegance thanks to timeless ribbing matching Hörmann's M and L-ribbed sectional garage doors.





**TPS 015** in Traffic white RAL 9016.



**TPS 025** in Traffic white RAL 9016.

#### **TPS 015**

Stainless steel handle HB 14-2 on steel infill, ribbed, U-value up to 1.3 W/m<sup>2</sup>K\*.

#### **TPS 015 side elements/transom lights**

- Double-pane insulated glass, Mastercarré/clear laminated safety glass
- Double-pane insulated glass, ornamental glass 504/clear laminated safety glass
- Double-pane insulated glass, sand-blasted float/clear laminated safety glass
- Double-pane insulated glass, clear laminated safety glass

#### **TPS 025**

Stainless steel handle HB 14-2 on steel infill, ribbed, full glazing: Double-pane insulated glass, Mastercarré and clear laminated safety glass. U-value up to 1.5 W/m<sup>2</sup>K\*.

#### **TPS 025 side elements/transom lights**

- Double-pane insulated glass, Mastercarré/clear laminated safety glass
- Double-pane insulated glass, clear laminated safety glass

#### **Glazing frame**

- Plastic round-style frame



#### **Colours/ surface finishes**

- In 11 preferred colours



## Classic style

These panel styles blend in perfectly with a panelled Hörmann garage door and underline your good taste.





**TPS 100** in Traffic white RAL 9016.



**TPS 200** in Traffic white RAL 9016.



**TPS 300** in Traffic white RAL 9016.



**TPS 400** in Traffic white RAL 9016.

◀ **TPS 300** in Traffic white RAL 9016, with side element (optional).

**TPS 100**

Stainless steel handle HB 14-2 on steel infill, with 6 panels. U-value up to 1.3 W/m<sup>2</sup>K\*.

**TPS 200**

Stainless steel handle HB 14-2 on steel infill, double-pane insulated glass, cathedral glass with small hammered finish and clear single-pane safety glass with surface-mounted rails. U-value up to 1.4 W/m<sup>2</sup>K\*.

**TPS 300**

Stainless steel handle HB 14-2 on steel infill, double-pane insulated glass, cathedral glass with small hammered finish and clear laminated safety glass with surface-mounted rails. U-value up to 1.8 W/m<sup>2</sup>K\*.

**TPS 400**

Stainless steel handle HB 14-2 on steel infill, double-pane insulated glass, cathedral glass with small hammered finish and clear laminated safety glass with surface-mounted rails. U-value up to 1.7 W/m<sup>2</sup>K\*.

**Side elements TPS 100/200**

Panel infill, 46 mm, with 3 panels

**Side elements TPS 300/400**

Panel infill, 46 mm, with 1 panel and double-pane insulated glass, cathedral glass with small hammered finish/clear laminated safety glass with surface-mounted rails.

**Transom light**

- Double-pane insulated glass, clear laminated safety glass

**Glazing frame**

- Plastic profile-style frame



**Colours/ surface finishes**

- In 11 preferred colours



**WK 2 version**

Door style TPS 100 without side elements or transom lights is also available in a break-in-resistant WK 2 version.




\* Dependent on door size

**A question of taste:**  
Select your favourite colour.



You can select according to your taste – whether you want classic white, one of several preferred colours or a Decograin surface – all matching your Hörmann garage door.

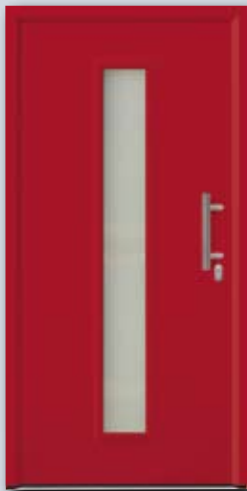

**TPS 020** in the preferred colour Ruby red RAL 3003.



**TPS 200** in the preferred colour Terra brown RAL 8028.



**TPS 800** in the Decograin surface Golden Oak.



**TPS 900** in the Decograin surface Titan Metallic.



**TPS 300** in the preferred colour Fir green RAL 6009.



**TPS 700** in the Decograin surface Dark Oak.

**In competitively-priced Traffic white as standard**

ThermoPro doors are supplied in Traffic white as standard.

**11 preferred colours**

Entrance doors also come in 11 inexpensive preferred colours for the exterior and interior.



White aluminium RAL 9006



Fir green RAL 6009



Terra brown RAL 8028




Moss green RAL 6005



Clay brown RAL 8003



Ochre brown RAL 8001




Light grey RAL 7035



Ruby red RAL 3003



Window grey RAL 7040



Cream RAL 9001



Anthracite grey RAL 7016


**Exclusively for the styles**

**TPS 010/TPS 700/TPS 800/TPS 900**

These styles are available with the exteriors and interiors of doors in the Decograin surface Golden Oak or Dark Oak for a natural timber look and in Titan Metallic for a modern door appearance.



Golden Oak



Dark Oak



Titan Metallic

The colours and surface finishes shown are subject to the limitations of the printing process and cannot be regarded as binding.

## It's your choice:

Individual handles and glazings for doors,  
side elements and transom lights



▲ TPS 700 in Decograin Titan Metallic, with side elements and transom light (optional).

All of the doors in Hörmann's ThermoPro entrance door range come with matching side elements and transom lights for a brighter entrance.



## Glazings for doors



### TPS 020/025/030

Mastercarré glazing with double-pane insulated glass (24 mm) is characterised by high thermal insulation with a U-value of up to 1.3 W/m<sup>2</sup>K. A modern, harmonious door appearance is created with a round-style plastic glazing frame.



### TPS 700/800/900

Triple-pane insulated glass (44 mm) provides an excellent thermal insulation value of up to 1.5 W/m<sup>2</sup>K (U-value). A flush-fitting appearance on the interior and exterior, as well as a stainless steel glazing frame, underscore the door's elegant look.



### TPS 200/300/400

Cathedral glazing made of double-pane insulated glass (24 mm) offers high thermal insulation and a U-value of up to 1.4 W/m<sup>2</sup>K. The profile-style plastic glazing frame perfectly blends in with the classic panel look.


## Glazings for side elements and transom lights



Float, sand-blasted



Clear glass



Mastercarré



Ornamental glass 504 white



Cathedral white

## A beautiful handle accents the door: Select your desired handle

As standard, all doors come with the exterior handle shown on pages 6–13. Alternatively, you can select a different handle (with narrow escutcheon ES0 or wide escutcheon ES1) or material:




ES0/ES1 lever/knob handle set with knob (shown: ES0 in aluminium)




ES0/ES1 door handle set (shown: ES0 in stainless steel)

**All handles available in two surfaces:**



Aluminium



Stainless steel

# ThermoPro

## Dimensions and fitting data

### Aluminium frame

#### Doors

Standard sizes		
Overall frame dimension (ordering size)	Structural opening	Clear passage
1,000 × 2,100	1,020 × 2,110	872 × 2,016
1,100 × 2,100	1,120 × 2,110	972 × 2,016

Special sizes	
	Overall frame dimension (ordering size)
TPS 100, 200, 300, 400	875 – 1,100 × 1,990 – 2,100
TPS 020, 025, 030, 700, 800, 900	875 – 1,250 × 1,990 – 2,250
TPS 010, 015, 040	875 – 1,250 × 1,875 – 2,250

All dimensions in mm

#### Side elements


Standard sizes	
	Overall frame dimension (ordering size)
Glass infill: Mastercarré, clear glass, sand-blasted float TPS 010, 015, 020, 025, 030, 040, 700, 800, 900	400 × 2,100
Panel infill: TPS 100, 200, 300, 400	450 × 2100

Special sizes	
	Overall frame dimension (ordering size)
Glass infill: TPS 010, 015, 020, 025, 030, 040, 700, 800, 900	400 – 500 × 2,250 mm


#### Transom lights

Special sizes	
	Overall frame dimension (ordering size)
Glass infill: TPS 010, 015, 020, 025, 030, 040, 700, 800, 900	875 – 2,250 × 400 – 500
Panel infill: TPS 100, 200, 300, 400	875 – 2,000 × 400 – 500


#### Horizontal view of door

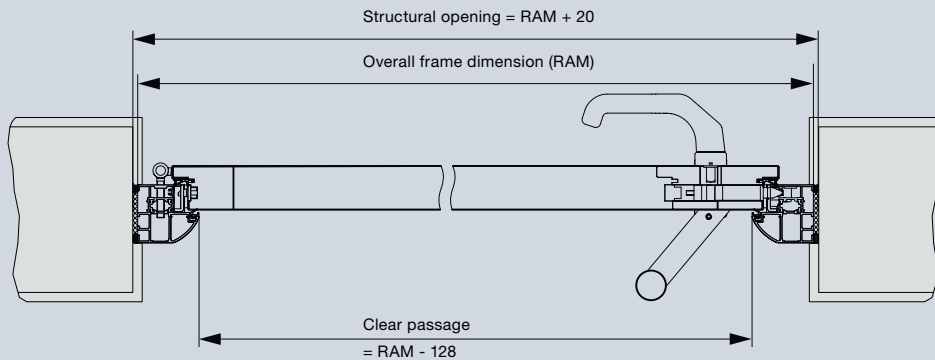

#### Vertical view of door

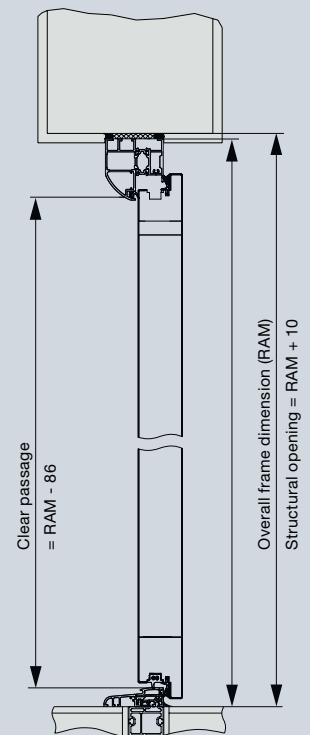

#### Horizontal view of side element

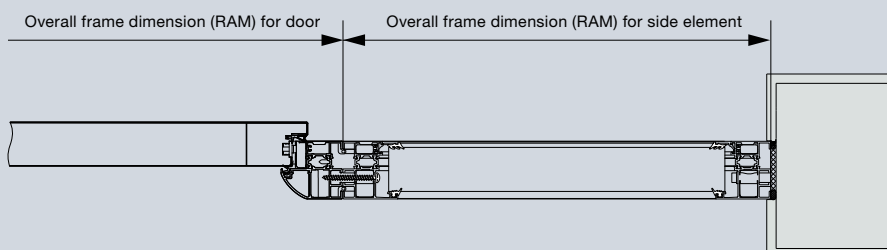

# Experience real Hörmann quality

For every application involving new construction and modernisation

## Garage doors

Perfectly match your personal architectural style: up-and-over or sectional doors made of steel or timber.

## Door operators

Enjoy extra convenience and security: Hörmann operators for garage doors and entrance gates.

## Entrance doors

You can find just the right door in our comprehensive aluminium entrance door ranges, with a model to fit almost every need and requirement.

## Steel doors

Sturdy doors for your whole home, from basement to roof.

## Frames

Choose from our comprehensive range of products for new construction, expansion, and modernisation.



[www.hoermann.com](http://www.hoermann.com)

All rights reserved. No part may be reproduced without our prior permission. Subject to changes.

# Hörmann: Quality without Compromise



Hörmann KG Amshausen



Hörmann KG Antriebstechnik



Hörmann KG Brandis



Hörmann KG Brockhagen



Hörmann KG Dissen



Hörmann KG Eckelhausen



Hörmann KG Freisen



Hörmann KG Ichtershhausen



Hörmann KG Werne



Hörmann Genk NV, Belgium



Hörmann Alkmaar B.V., Netherlands



Hörmann Legnica Sp. z o.o., Poland



Hörmann Beijing, China



Hörmann Tianjin, China



Hörmann LLC, Montgomery IL, USA



Hörmann Flexon, Leetsdale PA, USA

Hörmann is the only manufacturer worldwide that offers you a complete range of all major building products from one source. We manufacture in highly-specialised factories using the latest production technologies. The close-meshed network of sales and service companies throughout Europe, and activities in the USA and China, make Hörmann your strong partner for first-class building products, offering “Quality without Compromise”.

**GARAGE DOORS**

**OPERATORS**

**INDUSTRIAL DOORS**

**LOADING EQUIPMENT**

**HINGED DOORS**

**DOOR FRAMES**

